



Chef Stand Remote Freezer Base model 2000RF

model, 27" Drawer 20042RF 20065RF 20092RF
 model, 32" Drawer 20042RF-32 20065RF-32 20092RF-32

Description:

32 1/2" deep remote freezer base cooking equipment stand with reinforced stainless steel top. 12 gauge steel subtop, and full marine edge. R-404a refrigeration system, with evaporator blower coil and expansion valve supplied & installed. Condensing unit not provided. Unit on 6" high adjustable legs.

These units feature our Patented Drawer Cartridge Assembly. A fully welded, unitized drawer cartridge assembly with a quick release that allows the refrigerated drawers to be easily removed for cleaning. 3 year warranty on the entire drawer system.

Specifications:

CABINET EXTERIOR: Cabinet body is constructed of all metal. The top, front, and louver panel are stainless steel. Full length, 12 gauge steel subtop beneath one piece stainless steel top with 1/2" marine edged. Body ends are stainless steel. 6" stainless steel legs with adjustable bullet feet are mounted to a heavy gauge steel frame assembly which is integrally welded to bottom of assembly. Unit totally prewired to junction box.

CABINET INTERIOR: Interior of cabinet is fully coved to meet N.S.F. standard #7. The interior is constructed of anodized aluminum with coved corners for easy clean-up. Drawer opening frames are A.B.S. and contain magnetic strip for positive seal of drawer gaskets. Unit insulated with CFC free, foamed in place polyurethane.

REFRIGERATED DRAWERS: Fully welded, unitized drawer cartridge assembly -patented. Heavy duty full extension 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings. Will accommodate (2) 12" x 20" x 4" deep pans per drawer (pans not included). Quick release allows drawers to be easily removed for cleaning. Stainless fronts, mounted to drawer cartridge assembly with easy to grasp drawer handles. Provided with drawer frame heater to prevent gaskets freezing. Drawers with press fit magnetic gaskets - (designed for installation & removal without tools).

REFRIGERATION: CFC free, R-404a refrigeration systems standard. Includes Randell blower coil, defrost timer, and thermostatic control for operator adjustability. Blower coil fitted with expansion valve for fast recovery. Includes solenoid valve & thermostat, condensing unit not provided. Mullion coil, is coated to resist corrosion, and offers maximum air flow.

model 20065RF shown




Standard Features:

- R-404a refrigeration system, "CFC free" features thermostatic control for operator adjustability. Evaporator blower coil with expansion valve and refrigeration lines provided and installed. Condensing unit and controls not provided.
- Drawer Cartridge Assemblies are fully removable with Quick Release feature
- Foamed in place "CFC" free urethane insulation
- Marine edged stainless steel top with 12 gauge steel subtop to hold the heaviest cooking equipment
- Removable 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings
- Drawers to accommodate (2)12"x 20"x 4" pans per drawer (pans not included)
- 6" high adjustable legs

Options & Accessories:

- Heavy duty casters
- Flat top
- Electric condensate evaporator
- Length modification of: _____
- Mechanical housing on left

Note: Specify Refrigerant
Randell supplies R-404a as standard.



27" DRAWER MODELS

LEGEND FOR MODEL # 20042RF
AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
115V/60Hz/1P/VA

CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER

OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING

LEGEND FOR MODEL # 20065RF
AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
115V/60Hz/1P/VA

CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER

OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING


LEGEND FOR MODEL # 20092RF
AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
115V/60Hz/1P/VA


CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER


OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING








(1) SET OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)



(2) SETS OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

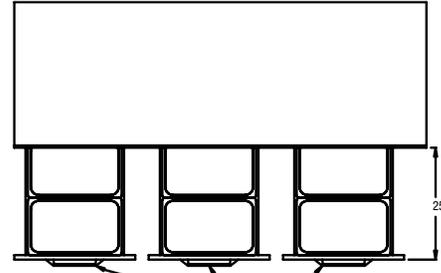

(3) SETS OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

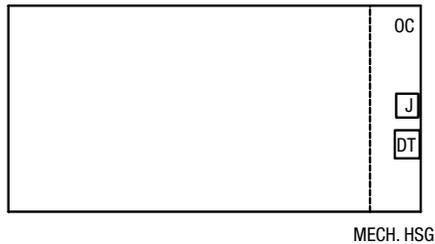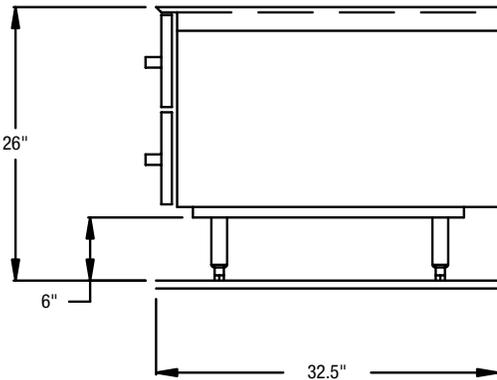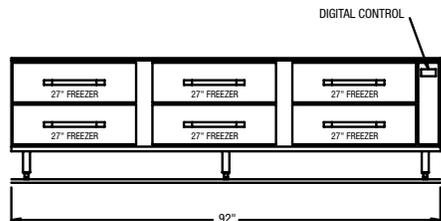

MECH. HSG.



The Randell Cartridge System! Patented.

- Fully welded 14 gauge unitized Drawer Cartridge assembly.
- 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings.
- Heavy duty full extension tracks to accommodate 12" x 20" x 4" deep pans, two per drawer. Pans by others.
- Quick release allows drawers and liners to be removed without tools.
- Drawers with stainless steel drawer fronts & easy to grasp drawer handles.

27" DRAWER REMOTE FREEZER MODELS (The load capacity of this equipment stand is rated up to 225 lbs per linear foot)

Model	L	D	H	Drawers	# of 12x20 Pans	Volt	Amp	BTUs	Ship Wt.
20042RF	42"	32 1/2"	26"	2	4	115/60/1	6	619	330
20065RF	65"	32 1/2"	26"	4	8	115/60/1	6	1093	460
20092RF	92"	32 1/2"	26"	6	12	115/60/1	8.5	1726	600



Component

32" DRAWER MODELS

LEGEND FOR MODEL # 20042RF-32
 AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
 115V/60Hz/1Ph/6A

CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER

OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING

LEGEND FOR MODEL # 20065RF-32
 AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
 115V/60Hz/1Ph/6A

CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER

OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING


LEGEND FOR MODEL # 20092RF-32
 AFF = ABOVE FIXED FLOOR

J JUNCTION BOX 14" AFF
 115V/60Hz/1Ph/6A


CHOOSE REFRIGERANT
 R-22 REFRIG.
 R404 REFRIG.
 R134A REFRIG.

DT DEFROST TIMER


OC CONDENSATE DRAIN 1/2" I.D. VINYL TUBING








(1) SET OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)



(2) SETS OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

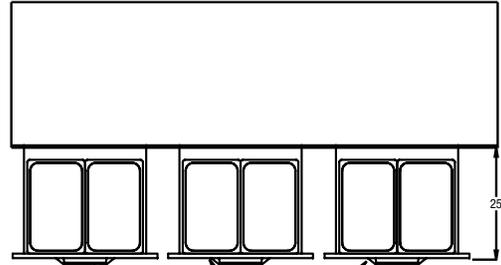

(3) SETS OF CARTRIDGE STYLE DRAWERS, EACH DRAWER TO HOLD (2) 12" X 20" X 4" DP PANS (PANS NOT PROVIDED)

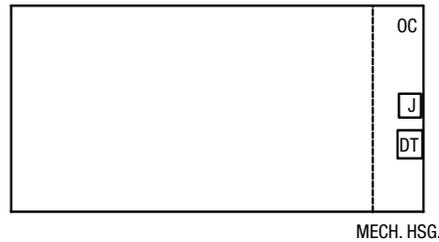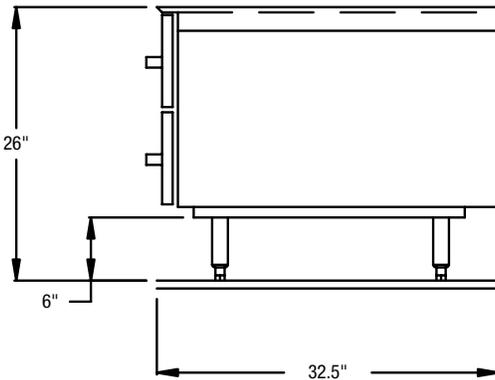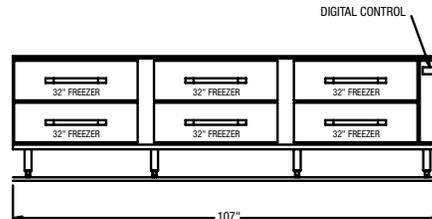

The Randell Cartridge System! Patented.

- Fully welded 14 gauge unitized Drawer Cartridge assembly.
- 14 gauge drawer tracks on 1 5/8" heavy duty stainless steel bearings.
- Heavy duty full extension tracks to accommodate 12" x 20" x 4" deep pans, two per drawer. Pans by others.
- Quick release allows drawers and liners to be removed without tools.
- Drawers with stainless steel drawer fronts & easy to grasp drawer handles.

32" DRAWER REMOTE FREEZER MODELS (The load capacity of this equipment stand is rated up to 225 lbs per linear foot)

Model	L	D	H	Drawers	# of 12x20 Pans	Volt	Amp	BTUs	Ship Wt.
20042RF-32	47"	32 1/2"	26"	2	4	115/60/1	6	619	330
20065RF-32	75"	32 1/2"	26"	4	8	115/60/1	6	1093	460
20092RF-32	107"	32 1/2"	26"	6	12	115/60/1	8.5	1726	600



Component