

Project	
Item #	
Quantity	

# Heated Drawer Warmer with Top Control

Models: HDWTC-1, -2, -3

Hatco Drawer Warmers ensure optimal holding of protein products at safe temperatures, while minimizing moisture loss and texture change. Our unique blanket element design promotes uniform temperatures throughout the cavity. Each drawer features adjustable sliding vents. Touchscreen Controller controls temperature and time for each drawer individually.

## Standard features

- Top-of-the-drawer Touchscreen Controller is positioned at an angle for greater visibility
- Controller allows individual temperature control and hold timer per drawer with both with both visual and audio alerts
- Robust stainless steel construction inside and out.
- Constructed of heavy duty, 12 gauge drawer frame and slides with nylon rollers
- Easy-to-clean seamless, interior core
- Snap out side panels make this unit easy to clean and service
- Each drawer has adjustable vents for varying moisture levels in individual drawers
- Drawer frame can accommodate varying pan configurations, including 1/1 GN, 1/3 GN, 1/3 GN up to 6" (152 mm) deep, with or without lids.
- Pans lift straight up; eliminating the need to tilt pan for removal
- USB port for easy software updates
- Unit comes standard with adjustable plastic legs 4"- 5.375" (102-137 mm)
- Includes 6' (1829 mm) cord located on the upper back corner



#### **Options** (available at time of purchase only)

Pan options

- ☐ 6" (152 mm) deep pan 20" x 12" x 6" (508 x 305 x 152 mm)
- ☐ Oversize pan, 20" x 15" x 5" (508 x 381 x 127 mm)
- □ No pan

### **Accessories**

□ Custom trivet raises food product .5" (13 mm) off bottom of full size pan 17.5" x 9.5" x .5" (445 x 242 x 13 mm)

Legs and Casters

- $\Box$ 6" (152 mm) Stainless Steel adjustable Legs adds 6"- 7.5" (152-191 mm) to height
- ☐ 6" (152 mm) plastic legs adds 6" (152 mm) to height
- □2" (51 mm) diameter Locking Casters all swivel, 2 lock adds 2.5" (64 mm) to height
- □3" (76 mm) diameter locking casters adds 4.25" (108 mm) to height
- □4" (102 mm) diameter locking casters adds 5.25" (133 mm) to height
- □5" (127 mm) diameter locking casters adds 6.25" (159 mm) to height
- ☐ Stainless Steel Food Pans

For operation, location and safety information, please refer to the Installation & Operating Manual.












# **Drawer Warmer with Top Control**

Models: HDWTC-1, -2, -3

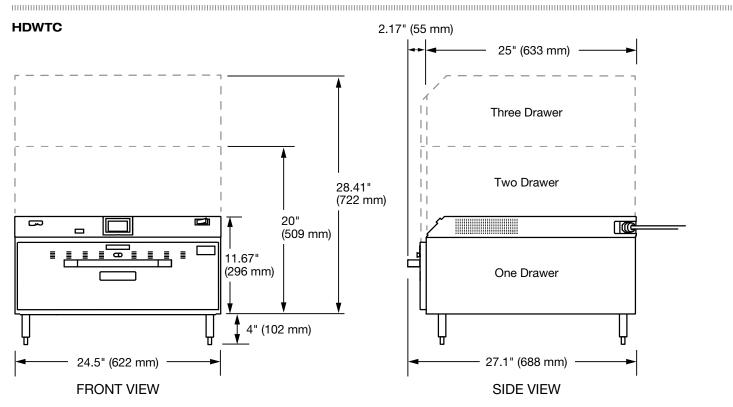

# SPECIFICATIONS Heated Drawer Warmers with Top Control

Models	Dimensions <sup>◆</sup> (W x D x H)	Volts	Watts	Amps	Plugs
HDWTC-1	24.5" x 27.17" x 15.67" (622 x 688 x 398 mm)	120	353	2.9	NEMA 5-15P
		220/230/240	323/353/384	1.5 / 1.5 /1.6	BS-1363, CEE 7/7
HDWTC-2	24.5" x 27.17" x 24" (622 x 688 x 611 mm)	120	704	5.9	NEMA 5-15P
		220/230/240	645/704/766	2.9 / 3.1 /3.2	BS-1363, CEE 7/7
HDWTC-3	24.5" x 27.17" x 32.41" (622 x 688 x 824 mm)	120	1055	8.8	NEMA 5-15P
		220/230/240	966/1055/1048	4.4 / 4.6 / 4.8	BS-1363, CEE 7/7

Height includes standard 4" (102 mm) plastic legs, depth includes door handles.

# **CORD LOCATION**

Top, back-left side, recessed to protect plug.

# PRODUCT SPECS Heated Drawer Warmers Top Control

The Drawer Warmers shall be a Hatco model ..., Top Control as manufactured by the Hatco Corporation, Milwaukee, WI 53234, U.S.A.

The unit shall have ... drawer(s) and be rated at ... watts, ... amps. Top Control model shall be equipped with a cord.

The Drawer Warmer shall have a stainless steel exterior, interior, drawer slides, and assembly. Drawer rollers shall be durable nylon. The drawer assembly shall fully extend to allow removal of pans without tilting models.

## **PLUG CONFIGURATIONS**





The unit shall be individually insulated top, bottom and sides of cabinet. Each unit shall have an angled, top of the unit Touch Screen control that allows individual temperature control and hold timer per drawer with both visual and audio alerts, adjustable vents for varying moisture levels in individual drawers, a USB port, 4" (102 mm) adjustable legs and heavy duty 12 gauge drawer frame.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee. WI 53234-0500 U.S.A.

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com