



## GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top, and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.

### FLEXIBILITY

Ideal for pass-through areas, buffet lines, or as a heated work shelf.

Model GRS features a rocker switch with indicator light and an adjustable thermostat ranging from 80° to 200°F (27° to 93°C). Surface-mounted blanket-type elements distribute heat under the entire stainless steel surface. All models are shipped factory assembled and include a 6' (1829 mm) cord and plug attached, ready to use.

### QUALITY

The following features assure the finest performance for years to come:

- Models feature a thermostatically-controlled heated base to extend the holding times of most food.
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm).
- Extruded aluminum base with stainless steel top – hardcoated aluminum surface is optional for the 19.5" (495 mm), 15.5" (394 mm), 21.5" (546 mm), and 23.5" (597mm) deep models
- Optional *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper



Model GRS-60-I



Model GRS-36-I with accessory pan rail and food pans



Model GRS-36-I with optional hardcoated aluminum surface (standard 19.5" (495 mm) deep models only)



Model GRS-30-I with optional *Designer* color and accessory food pans

BLANKET ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR ONE YEAR.



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. GRS Spec Sheet

Printed in U.S.A.  
 January 2012



# GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

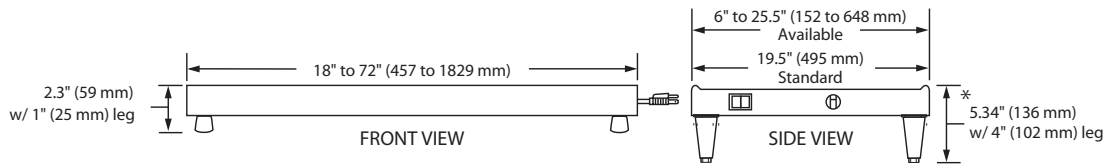

## SPECIFICATIONS FOR STANDARD 19.5 (495 mm) DEPTH

Model	Watts	Width	Shipping Weight
GRS-18-I	250	18" ( 457 mm)	16 lbs. ( 7 kg)
GRS-24-I	350	24" ( 610 mm)	20 lbs. ( 9 kg)
GRS-30-I*	450	30" ( 762 mm)	25 lbs. (11 kg)
GRS-36-I	550	36" ( 914 mm)	28 lbs. (13 kg)
GRS-42-I†	600	42" (1067 mm)	32 lbs. (15 kg)
GRS-48-I†	700	48" (1219 mm)	36 lbs. (16 kg)
GRS-54-I†	800	54" (1372 mm)	42 lbs. (19 kg)
GRS-60-I†	900	60" (1524 mm)	44 lbs. (20 kg)
GRS-66-I†	1000	66" (1676 mm)	50 lbs. (23 kg)
GRS-72-I†	1100	72" (1829 mm)	56 lbs. (25 kg)

\* Indicates models that accommodate multiple food pans: 30" (762 mm) = 2 pans, 42" (1067 mm) = 3 pans, 54" (1372 mm) = 4 pans, and 66" (1676 mm) = 5 pans.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

## DIMENSIONS

GRS (Standard Depth): Model shown is 18"-72"W x 19.5"D x 2.3"H\* (457-1829 x 495 x 59 mm).

\* Add 3" (76 mm) to height when using 4" (102 mm) legs.


## VOLTAGE

120 volts, single phase only, (uses NEMA 5-15P).  
Export voltages available.

## CORD LOCATION

Is on the same end as the switch

## PLUG CONFIGURATIONS



## GRS Models are available in depths of:

Model	Depths	Model	Depths
A	6" (152 mm)	G	15.75" (400 mm)
B	7.75" (197 mm)	H	17.5" (445 mm)
C	9.75" (248 mm)	I	19.5" (495 mm)
D	12" (305 mm)	J	21.5" (546 mm)
E	13.75" (349 mm)	K	23.5" (597 mm)
F	15.5" (394 mm)	L	25.5" (648 mm)

## WATTS

Model	A	B	C	D	E	F	G	H	I	J	K	L
GRS-18-(X)	100	100	125	200	200	200	225	225	250	300	325	350
GRS-24-(X)	125	125	175	250	250	250	300	300	350	375	425	475
GRS-30-(X)	150	150	225	300	300	300	375	375	450	450	525	600
GRS-36-(X)	175	175	275	350	350	350	450	450	550	525	625	725
GRS-42-(X)	225	225	300	450	450	450	525	525	600	675	750	825
GRS-48-(X)	250	250	350	500	500	500	600	600	700	750	850	950
GRS-54-(X)	275	275	400	550	550	550	675	675	800	825	950	1075
GRS-60-(X)	300	300	450	600	600	600	750	750	900	900	1050	1200
GRS-66-(X)	325	325	500	650	650	650	825	825	1000	975	1150	1325
GRS-72-(X)	350	350	550	700	700	700	900	900	1100	1050	1250	1450

## OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, and Antique Copper
- Hardcoated Surface for 15.5" (394 mm), 19.5" (495 mm), 21.5" (546 mm), or 23.5" (597mm) depth models only

## ACCESSORIES

- 4" (102 mm) Adjustable Legs (Standard on units over 36" (914 mm) in width)
- Slant Leg Kit (Models 12" (305 mm) deep or deeper)
- Pan Rail (19.5" (495 mm) deep models only)

## PRODUCT SPECS

### Heated Shelf

The Heated Shelf shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall

width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit, and pan rail.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350  
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com