

Champion®

The Dishwashing Machine Specialists

Project _____

Item No. _____

Quantity _____

MODEL LD-20-PT WASHER

STANDARD FEATURES

- Heavy-duty stainless steel construction
- Pass-thru operation
- Heavy-duty 15 Hp pump
- Recirculating wash water
- High velocity, stainless steel "V" jets
- Wash/rinse cycle of just 5 minutes
- Electric, gas or steam heat
- External rinse hose and spray gun
- Recirculating wash water
- Moisture resistant control gauges
- Digital Control & Information Center
- Self containing water heating
- Fresh water sanitizing rinse
- Removable, dual filtration system
- One-year parts and labor warranty

MODEL LD-20-PT

Pot, Pan and Utensil Washer



Photo is for general visual representation only. Please refer to specifications for the latest detailed product information.




OPTIONS

Tank Heat

- Steam
 Gas

Additional Lift Door and Split Door Models:

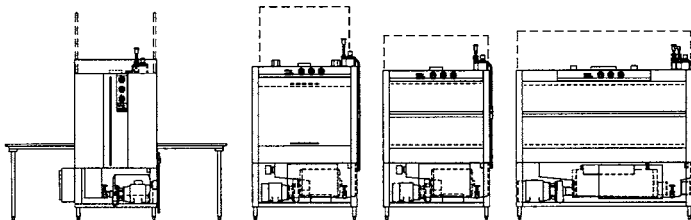

- LD-12-PT LD-20 SD-20 SD-36

SPECIFIER STATEMENT

Specified unit will be Champion Industries model LD-20 pot, pan and utensil washer.

Features include lift door design, 7.5 Hp pump motor, 20 pan capacity, push button control and information center, recirculating wash water and 27 second wash/rinse cycle.

1 year parts and labor warranty.

Champion Industries, Inc.
 3765 Champion Blvd., Winston-Salem, NC 27105
 Tel: 336/661-1556 Fax: 336/661-1979

2674 N. Service Road,
 Jordan Station, Ontario, Canada L0R 1S0
 Tel: 905/562-4195 Fax: 905/562-4618

www.championindustries.com


LD-20-PT

Pot, Pan and
Utensil Washer

Champion[®]

The Dishwashing Machine Specialists

Dimensions shown in inches

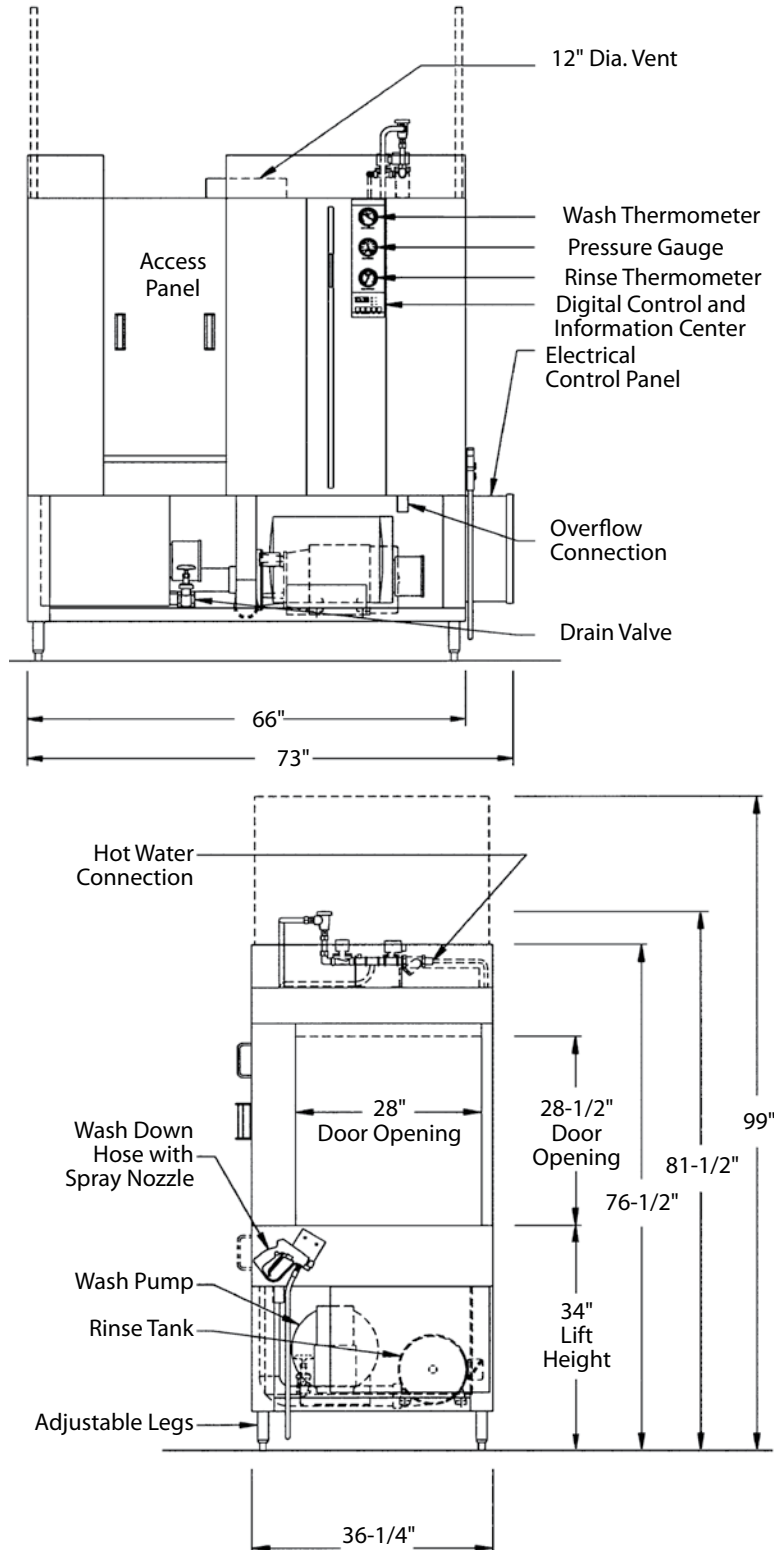

SPECIFICATIONS

Machine Construction

12, 14, & 16 gauge stainless steel. All seams tig welded, cleaned and polished.

Door

Stainless steel, counter-balanced with self-lubricating guides. Stainless steel cables on nylon rollers with guards to insure tracking.

Spray Arm Assembly

Water driven, stainless steel spray arm assembly with stainless steel jets, removable end caps and hand operated quick release mechanism for easy cleaning and reassembly. Mounted on stainless steel base.

Filter

Perforated, removable, stainless steel baskets.

Water Pump

15 Hp, 208/240 or 480 volt, 3 phase, 60 cycle with output of 250 gallons per minute at 35 to 45 P.S.I.

Digital Control & Information Center

120 volt control circuit with push pad operation of "Power On", "Stop" and "Short, Medium or Long Wash Cycles". A digital display indicates "Time Remaining" for each cycle. LED's indicate wash, rinse and unload functions. A buzzer is also included to provide an audible indication of time to unload. A pre-programmed circuit board allows the push pad to be used as a "Diagnostic Center" by displaying "Error Codes" for ease of troubleshooting.

Gauges

Wash temperature, rinse temperature, wash pressure. Special moisture resistant design.

Wash Tank

Stainless steel with electric, infrared gas or steam coil heating. Thermostatically controlled, low water protected, sloped to drain 50 gallon capacity.

Booster Heater

Electric, infrared gas or steam coil heating 208/240 or 480 volt to provide 180°F/190°F hot sanitizing rinse.

Racks

Stainless steel rod, built to match specific washing requirements.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., 3765 Champion Blvd., Winston-Salem, NC 27105 • 336/661-1556 • Fax: 336/661-1979 • www.championindustries.com

Washer	Automatic washing machine designed to wash all pots, pans and utensils commonly used in baking and cooking operations.
Cabinet	50" wide x 36" deep x 73" high. Overall height with door open: 100-3/4". Door opening: 40" wide x 28-1/2" high. Constructed of 12, 14 & 16 gauge, type 304 #3 finish, stainless steel. All seams tig-welded, cleaned and polished.
Door	Lift-up door type. Counter balanced with self-lubricating guides, stainless steel cables on nylon rollers with cable guards to insure tracking. Door is interlocked with proximity switch to prevent machine operation while door is open. Door construction: 16 gauge, type 304 #3 finish, stainless steel.
Recirculating Wash Tank	Heated by 12 kW total 208/240, 480 or optional 575 volt electric immersion heater, thermostatically controlled wash temperature and low water protection system. 36 gallons (27 gallons if infrared heated), 14 gauge stainless steel, sloped to drain. Infrared gas and steam heating options available.
Wash Tank Filter	Perforated, stainless steel basket type, double filter system for increased effectiveness and easy cleaning without emptying wash tank.
Wash Tank Fill Valve	Size 1/2" brass material, solenoid type, automatic.
Wash Tank Drain Valve	Size 1-1/4" brass material, gate type for manual or electrically operated ball valve for automatic option.
Wash Pump	7.5 hp, 208/240, 480 or optional 575 volt, 3 phase, 60 cycle. Close coupled; 120 gallons per minute at 35 to 45 psi, mounted on 12 gauge stainless steel formed channel base.
Spray Arm Assemblies	Water driven, stainless steel spray arm assemblies, top and bottom, with stainless steel jets and quick-release mechanism for easy cleaning and reassembly.
Sanitizing Rinse Tank	Stainless steel, 10 gallon capacity, with 12 kW total 208/240, 480 or optional 575 volt electric booster heater to provide 180°/190° F hot sanitizing rinse. Uses 5 gallons per 27 second cycle. Infrared gas and steam coil heating options available.
Rinse Supply Valve	Size 3/4" brass material, solenoid type, automatic.
Final Rinse	Type 304 stainless steel tubing with brass compression fittings and brass or optional stainless steel full cone rinse jets.
Control & Information Center	120 volt control circuit with push pad operation of "Power On," "Stop" and "Short, Medium or Long Wash Cycles." A digital display indicates "Time Remaining" for each cycle. LED's indicated wash, rinse and unload functions. A buzzer is also included to provide an audible indication when the machine is ready to unload. A pre-programmed circuit board allows the push pad to be used as a "Diagnostic Center" by displaying "Error Codes" for ease of troubleshooting. Moisture resistant gauges measure Wash Temperature, Wash Pressure and Rinse Temperature.
Wash Down Spray Hose	Externally mounted spray hose with spray gun for easy cleaning and maintenance of machine.
Steam Exhaust Vent	Steam exhaust vent 6-3/4" diameter, consisting of 16 gauge rolled collar for PVC pipe connection bolted to the top of the machine. Machine pre-wired with control timer for the addition of a fan.
Optional Exhaust Fan	Draft inducer fan side mounted on exhaust duct to extract excess steam after final rinse cycle. 300 CFM @ .05" static pressure. 1/10 Hp, 110 volt motor, 1550 RPM.



The Dishwashing Machine Specialists

SPECIFICATIONS MODEL LD-20 POT, PAN & UTENSIL WASHER

Racks

Customized to hold your specific items. Standard bakery racks include utensil basket with (2) hold-down lids and (2) bun/sheet pans insert designed to hold (10) pans, constructed of stainless steel rod, mig-welded.

Connections

Water Inlet: 120°F, 3/4" NPT
Water Drain and Overflow: 1-1/4" NPT
Electrical: Two point connection, except 575 volt, which is single point.
Steam Heating Option: 1/2" NPT
Natural or Propane Gas Heating Option: 1/2" NPT.

Services

120 Volt -1 phase, 5 running amps, 15 amp service, plus one of the following:

Elec. Spec.	Running Amps	
	Electric Wash Electric Booster	Steam Wash ¹ Steam Booster
208 Volt 3 phase	86	19
240 Volt 3 phase	79	18
480 Volt 3 phase	40	9

¹ Steam Supply: Consumption: 95 lbs./hr. @ 15 psi minimum

² Gas Supply: Consumption: 90,000 BTU/hr.

Certifications

NSF, UL and UL Sanitation Listed (all). CUL Listed (electric and steam only).

