



Project _____

Item # _____

Quantity _____

Flav-R 2-Go® Locker System - Floor Mount

Models: F2G-24-A, -34-A
F2G-24-C, -34-C

The Hatco Flav-R 2-Go® Locker System - Floor Mount, designed specifically for your pick-up and third-party delivery needs, is capable of holding multiple orders of hot or ambient food with quick and secure access. By reducing congestion and allowing employees to focus on other functions, customers or delivery people can arrive, access their specific locker, and leave without waiting in line or disturbing the flow of other business.

Standard features

- Ideal for handling pick-up, third-party delivery and to-go orders in a contactless manner so there is no human interaction to keep both customers and employees safe
- Counter top and built-in models also available, see alternate spec sheets
- Individual lockers can have the heat turned off for ambient storage
- Each locker has a timer that will hold prepared and packaged food for up to 45 minutes
- Lockers come preset to 150°F (66°C) but can be adjusted up to 200°F (93°C)
- Large 10" (254 mm) touchscreen for easy viewing (front and/or back)
- On pass-through units, customer side stays locked. When the access code is used, the door unlocks and LED lights flash in the appropriate locker
- Internal lights can be programmed to six different colors: blue (standard), red, green, yellow, magenta or white
- Manual (standard) or POS integration capabilities available (outside vendor required)
- Available with pass-through or one-sided access. Available in two locker depth sizes, *Designer* colors and the ability to have a custom logo on the customer side glass doors



F2G-24-A
shown on operators
side, in standard
Designer Warm Red

Options (available at time of purchase only)

Designer Colors –

Non-standard colors are non-returnable – Warm Red standard

- Black Gray Granite White Granite
- Navy Blue Hunter Green Antique Copper

Right Side Control Panel – left side control panel standard – F2G-34 model only –

Back panels – Creates a non-pass-through unit – (The power switch will move beside cord location) (subtract .58" [14 mm] to the depth) –

Cord location: Side of unit, facing operator side, right side of unit, bottom corner closest to operator side – in lieu of standard: facing operator side, left side of unit, bottom corner closest to operator side –

Accessories

- Wall Mount Bracket (mounting hardware not included)

For operation, location and safety information, please refer to the Installation & Operating Manual.




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com




Flav-R 2-Go® Locker System - Floor Mount

Models: F2G-24-A, -34-A F2G-24-C, -34-C

F2G-24

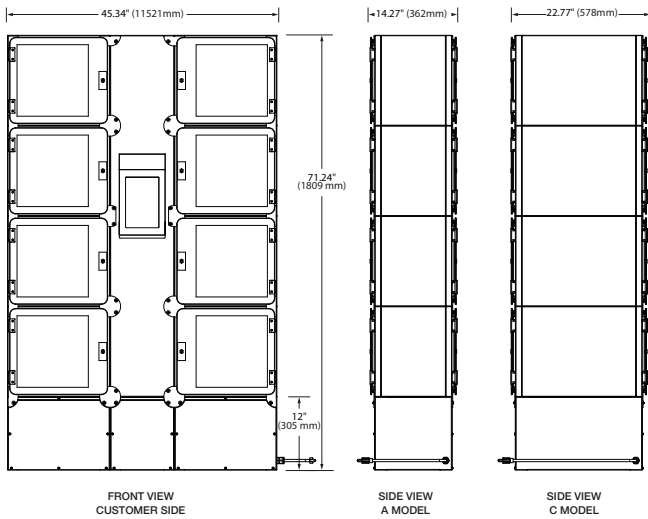

F2G-34

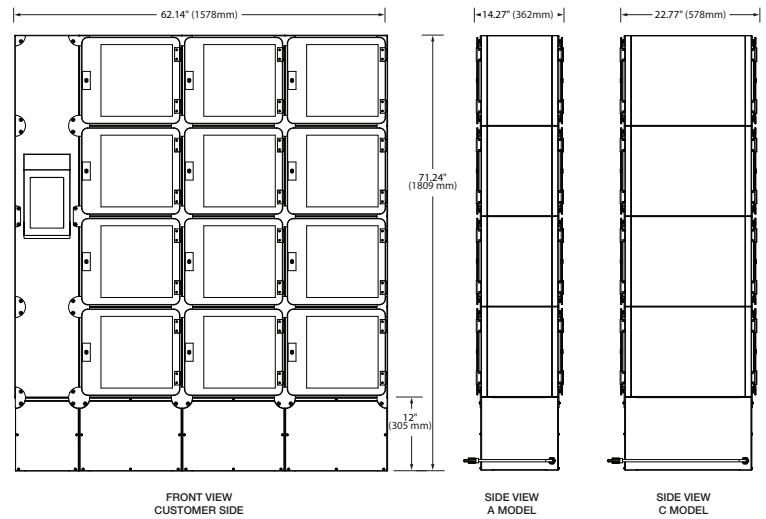

SPECIFICATIONS

Flav-R 2-Go® Locker Systems - Floor Mount

Model	Model Dimensions (W x D x H)	Number of Lockers	Internal Locker Dimensions	Volts	Watts	Amps	Plug
F2G-24-A	45.34" x 14.27" x 71.24" (1152 x 362 x 1809 mm)	8 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	120	831	7.3	NEMA 5-15P
F2G-24-C	45.34" x 22.77" x 71.24" (1152 x 578 x 1809 mm)	8 lockers	12" x 20.5" x 12" (305 x 521 x 305 mm)	120	1087	9.4	NEMA 5-15P
F2G-34-A	62.14" x 14.27" x 71.24" (1578 x 362 x 1809 mm)	12 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	120	1239	10.8	NEMA 5-15P
F2G-34-C	62.14" x 22.77" x 71.24" (1578 x 578 x 1809 mm)	12 lockers	12" x 20.5" x 12" (305 x 521 x 305 mm)	120	1623	14.0	NEMA 5-15P [▲]

[▲] Canadian models use NEMA 5-20P.

CORD LOCATION

Facing operator side, left side of unit, bottom corner closest to operator side.

PLUG CONFIGURATIONS

NEMA 5-15P

NEMA 5-20P



PRODUCT SPECS

Flav-R 2-Go® Locker System

The Locker System shall be a Flav-R 2-Go® Model ... , rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The lockers shall consist of magnetically locked hinged doors, heated base, a 10"

(254 mm) touchscreen controller on one or both sides of the unit, a Power on/off switch, LED lighting and a 6' (1829 mm) cord with plug attached.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com