



Over 90 Years of Quality Foodservice
Products and Service

Job _____ Item No. _____

MOD100 SERIES-SINGLE WELL TOP-MOUNT, RECTANGULAR DROP-IN WARMERS



MOD100

DESCRIPTION

Heavy-duty, top-mount, drop-in, modular food warmers are designed to hold heated foods at safe serving temperatures. Wells MOD100 Series accommodates one 12" x 20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation.

SPECIFICATIONS

Construction - One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellsloks are standard for quick and easy installation.

Insulation - Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery.

Controls & Heating - Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

STANDARD FEATURES

- Accommodates 1 - 12" x 20" standard inset pans or equivalent fractional pans
- One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans
- Suitable for wet (recommended) or dry operation (do not use autofill warmers in dry mode)
- Fully Insulated models are perfect for non-metal counters
- Thermostatic or infinite controls
- Separate controls for each individual wells
- High limits prevent overheating
- Thermostatic controls are recessed in a one-piece, front-mounted panel
- Wellslok standard for ease of installation
- Powerful tubular heating elements
- 1/2" drains and manifolds available
- Cord and plugs available
- Two Year Limited Parts & One Year Limited Labor Warranty

ADDITIONAL FEATURES

- Auto water-fill to maintain proper water level.
- Select models are field convertible from 3ø to 1ø
- Drains & Drains with manifolds
- Thermostatic or infinite controls

OPTIONS & ACCESSORIES

- Adaptor tops for round insets
- Inset with lid
- 8oz. soup ladle
- Drain valve extension kit
- Drain screens
- Wellslok extension kits for wood counter installations
- 6" cords and plugs are available on all 120V models
- 6" cords and plugs are available on all 208/240V models
- Optional 72" wiring

Sheet No. MOD1 [07/15]



Wells Bloomfield · 10 Sunnen Drive St. Louis, MO 63143 U.S.A.


Phone (314) 678-6314 · Fax (314) 781-5445 · www.WellsBloomfield.com · Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.



Over 90 Years of Quality Foodservice Products and Service

MOD100 SERIES-SINGLE WELL TOP-MOUNT, RECTANGULAR DROP-IN WARMERS

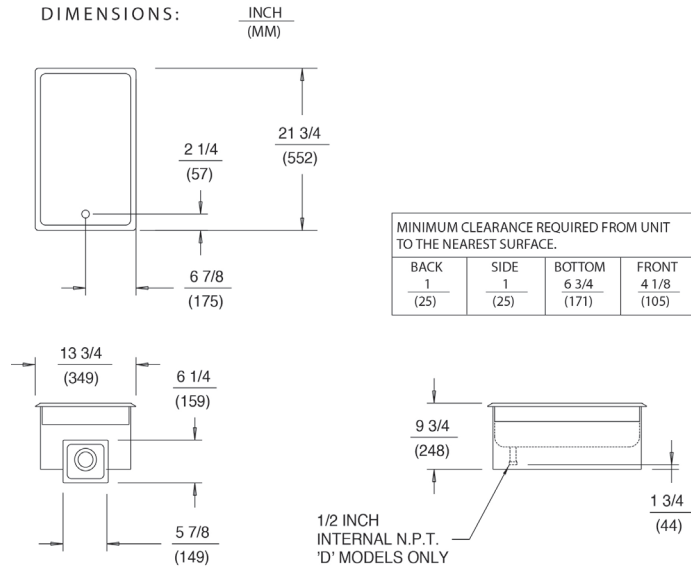

MODELS	DESCRIPTION	VOLTS	WATTS	PHASE	POWER	OVERALL (MM)			PANEL (MM)		SHIP (kg)	CRATE SIZE	APPROVED
						WIDTH	LENGTH	HEIGHT	WIDTH	HEIGHT			
MOD100-120	Infinite controls no drains	120V	1200	1Ø	N/A	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100	Infinite controls no drains	208/240V	900/ 1200	1Ø	N/A	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100CSA	Infinite controls no Drains	120V 240V	1200	1Ø	N/A	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF SP
MOD100D-120	Infinite controls with Drains	120V	1200	1Ø	N/A	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100D	Infinite Controls with Drains	208/240V	900/ 1200	1Ø	N/A	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100T-120	Thermostatic Controls no Drains	120V	1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100T	Thermostatic Controls no Drains	208/240V	1240/ 1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100T-230	Thermostatic Controls no Drains	220-240V	1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	CE
MOD100TD-120	Thermostatic Controls with Drains	120V	1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100TD	Thermostatic Controls with Drains	208/240V	1240/ 1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	NSF UL
MOD100TD-230	Thermostatic Controls with Drains	220/240V	1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	5-7/8 (149)	6-1/4 (159)	24 (10.9)	4.5 (0.128)	CE
MOD100TDAF	Thermostatic Controls with Drains and Auto-Fill	208/240V	1240/ 1650	1Ø	NONE	13-3/4 (349)	21-3/4 (552)	9-3/4 (248)	14 (356)	6-1/4 (159)	30 (13.6)	4.5 (0.128)	NSF UL

Cords and plugs are available on thermostatic control models only (120V 208/240V models). AutoFill models require water connection. Refer to owner's manual and installation instructions.



Sheet No. MOD1 [07/15]



Wells Bloomfield · 10 Sunnen Drive St. Louis, MO 63143 U.S.A.
Phone (314) 678-6314 · Fax (314) 781-5445 · www.WellsBloomfield.com · Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.