Job Item No
-------------

## RCTS-4 Self-Contained Refrigerated Counter Top Server



Model RCTS-4 (food not included)

#### **DESCRIPTION**

Wells RCTS-4 is a self-contained refrigerated counter top system that is designed to hold toppings, condiments, or practically any food at NSF-7 safe temperatures. The RCTS includes coldwell refrigeration, foamed-in place insulation, stainless steel construction, 4 each easily removable pans, ½" feet and 4' cord & plug.

### **SPECIFICATIONS**

**Exterior –** Wells RCTS features all stainless steel exterior construction, 1/2" – rubber feet, 4' cord & NEMA 5-15P plug with strain relief. Comes with 4-each easily removable 6"-deep 1/6th - size clear, polycarbonate inset pans with hinged lids and will accommodate any equivalent assortment of 2/3rd-size, 1/3rd – size, 1/6th –size or 1/9th –size pans.

**Controls** – Features adjustable temperature controls with digital read-out and lighted on/off rocker switch.

**Refrigeration –** RCTS is NSF-7 compliant @35° F product temperature utilizing a 1/6-HP compressor, 300 BTUH and R-134A refrigerant, 120V, 60 HZ.

#### STANDARD FEATURES

- Self-contained refrigeration system
- □ NSF-7 Compliant at 35° F product temperature
- ☐ Foamed-in-place insulation
- ☐ Stainless steel front, top and sides
- ☐ Includes 4-each removable 1/6th size, 6" deep, clear, polycarbonate inset pans with hinged lids
- Accommodates equivalent 2/3rd-size, 1/3rd-size 1/6th-size or 1/9th-size pans
- ☐ Sanitation approved for pans in depths from 2" to 6" deep
- ☐ Includes adapter bar to support smaller fractional pans
- ☐ Pans are easily removable for ease of cleaning
- ☐ ½" rubber feet
- ☐ 4' cord & NEMA 5-15P plug with strain relief
- ☐ 1/6-HP compressor @ 300 BTUH
- ☐ R-134A Refrigerant
- □ 120V, 60HZ


#### **OPTIONS & ACCESSORIES**

- □ 5-year compressor warranty (4 additional years)
- ☐ All 16 & 20 gage stainless steel inside & out

## **CERTIFICATIONS**










# RCTS-4 Self-Contained Refrigerated Counter Top Server

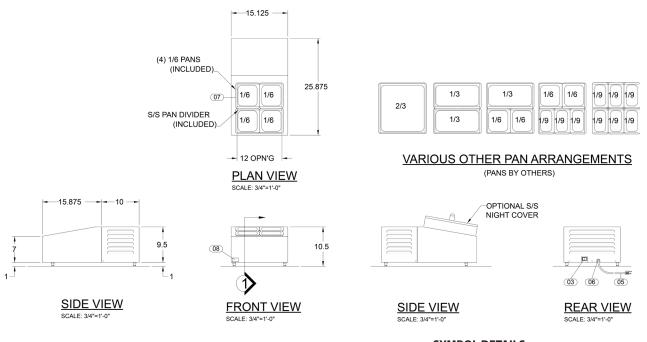

#### BREAKER STRIP 4 SIDES S/S-01> 02 13 125 REMOVABLE SHROUD S/S-01 S/S-01 S/S-01 (07) **01**) 6.125 3/8" COPPER 04 04 S/S-02> (INS-01) S/S-01> S/S-02 **TUBING WRAP SECTION 1**

SCALE: 1 1/2"=1'-0"

#### **SYMBOL DETAILS**

01	Compressor; 115V, 60 HZ, 300 BTUH, R-134A
02	Temperature Control
03	Lighted On/Off rocker Switch
04	Adjustable Feet with Rubber Toe
05	4' Power Cord with NEMA 5-15P Plug
06	Strain Relief
07	1/6th Size, 6" deep Poly Carbonate Inset Pans
	with Hinged Lids
08	Logo
S/S-01	20 Gauge Stainless Steel
S/S-02	16 Gauge Stainless Steel
S/S-01	20 Gauge Stainless Steel
S/S-01	16 Gauge Stainless Steel
INS-01	Foamed-In-Place Polyurethane Insulation

	SPECIFICATIONS									
Model No.	Overall Dimensions Inches mm	Opening Size	Voltage	Watts	HP	Amps	Phase	Power Supply	Refrigerant	Shipping Weight
RCTS-4	15-1/8″W x 25-7/8″L x 10-1/2″H 384mm x 655mm x 267mm	12" x 12" 305mm x 305mm	120V	240	1/6	2	1	NEMA 5-15P	134A	70 lbs. 33.6 kg

MINIMUM CLEARANCES							
LEFT SIDE	RIGHT SIDE	REAR	BOTTOM				
1"	1"	1"	1"				
25.4mm	25.4mm	25.4mm	25.4mm				

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



**Wells Bloomfield** • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A. Phone: (314) 678-6314 • Fax (314) 781-5445 www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.